




Features

- Up to 180 lumens per foot and 82+ CRI
- Available in six interconnectable kit lengths in 2700K (WW) and 5000K (WH)
- 120V kits consume only 3 watts per foot
- Dimmable with most CL and ELV dimmers
- Economical - create long run distances without the need for a driver (150ft max run)
- cETLus Listed[†]
- Suitable for indoor and outdoor use
- 30,000 hours rated life

Available Colors



2700K 5000K

Dimming Options

- CL (10-100%)
- ELV (10-100%)

Listing / Ratings[†]



Hybrid 2 Kits - 120V


Superb light output for indoor and outdoor use. Warm White and Bright White interconnectable kits emit 145 and 180 lumens per foot of light, respectively, while maintaining ETL Listing. Parallel wiring ensures that if one LED goes out, the rest of the LEDs continue to operate. Tool-free interconnection of kits and practical linking cables, and various mounting accessories make installation fast and straightforward.

Technical Information

Series	H2-KIT
Input Voltage	120V AC, 60Hz
CCT	2700K / 5000K
CRI	82+ (2700K / 5000K)
Wattage	3W per ft
Lumens	Up to 180Lm per ft (see individual product)
Max Run	150 feet
Cuttable	Non-Cuttable [†]
IP Rating	IP65 (uncut), void if cut
Dimmable	10-100%*
Rating	cETLus Listed [†] for indoor/outdoor use
Rated Life	30,000 hrs

*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

[†]cETLus Listing for 120V is void if cut; No accessories available for cut product

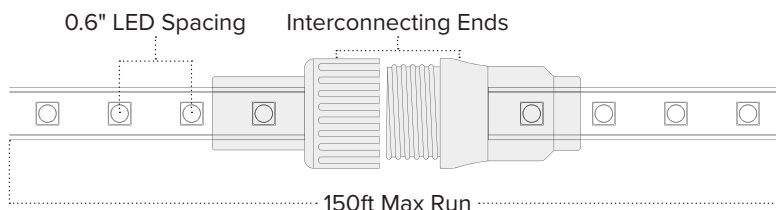



HYBRID 2 KITS ORDERING INFORMATION

ITEM NUMBER	CCT	LENGTH	LUMENS / FT	WATTAGE	IP RATING	CRI	CUTTING
H2-KIT-3-WW	2700K	3 ft	145Lm / ft	9W	IP65	82+	Non-cuttable
H2-KIT-6-WW	2700K	6 ft	145Lm / ft	18W	IP65	82+	Non-cuttable
H2-KIT-12-WW	2700K	12 ft	145Lm / ft	36W	IP65	82+	Non-cuttable
H2-KIT-18-WW	2700K	18 ft	145Lm / ft	54W	IP65	82+	Non-cuttable
H2-KIT-30-WW	2700K	30 ft	145Lm / ft	90W	IP65	82+	Non-cuttable
H2-KIT-45-WW	2700K	45 ft	145Lm / ft	135W	IP65	82+	Non-cuttable
H2-KIT-3-WH	5000K	3 ft	180Lm / ft	9W	IP65	82+	Non-cuttable
H2-KIT-6-WH	5000K	6 ft	180Lm / ft	18W	IP65	82+	Non-cuttable
H2-KIT-12-WH	5000K	12 ft	180Lm / ft	36W	IP65	82+	Non-cuttable
H2-KIT-18-WH	5000K	18 ft	180Lm / ft	54W	IP65	82+	Non-cuttable
H2-KIT-30-WH	5000K	30 ft	180Lm / ft	90W	IP65	82+	Non-cuttable
H2-KIT-45-WH	5000K	45 ft	180Lm / ft	135W	IP65	82+	Non-cuttable


Hybrid 2 Kits Include: (1) length of Hybrid 2 with molded male+female connectors (1) 5ft Removable power cord / (1) Removable end cap / (1) Plastic mounting clip per foot of length

HYBRID 2 ACCESSORIES


ITEM NUMBER	DESCRIPTION
H2-KIT-JUMP.5	6" linking cable
H2-KIT-JUMP3	3' linking cable
H2-KIT-JUMP6	6' linking cable
H2-CLIPS	Mounting clips (qty 10)
H2-TRACK-3	3' plastic mounting track
H2-CHAN-3	3' aluminum mounting channel



H2-KIT-JUMP.5
H2-KIT-JUMP3
H2-KIT-JUMP6



H2-CLIPS



H2-TRACK-3



H2-CHAN-3

Hybrid 2 Kit Set-up

