



Features

- Available in four interconnectable lengths
- 3-in-1 5050 RGB LEDs every 0.6" create bright and dynamic effect lighting
- 120V system consumes up to 2.7 watts per foot and maximizes run distance (150ft max run)
- cETLus Listed[†]
- Suitable for indoor use and limited outdoor use in areas protected from extreme weather
- 20,000 hours rated life

Available Colors



RGB

Control Options*

- RGB-H2-IR-5A
- RGB-H2-CTRL with Standalone Mode
- RGB-H2-CTRL plus DMX Control
- RGB-H2-CTRL + RGB-H2-REC-RF for Radio Frequency Options

Listing / Ratings[†]



Hybrid 2 RGB - 120V


Four convenient lengths of 120V AC Hybrid 2 RGB are interconnectable up to 150 feet. With a low-profile, Hybrid 2 RGB is efficient and effective, using less than 3 watts per foot. Parallel wiring to each LED means if one LED goes out, the rest still get power. Use with the 120V plug-in Standalone Controller (required*) which has built-in color select, preset effect, speed, and brightness options; or interface with DMX equipment; or add an RF Receiver for Trulux RF control.


Technical Information

Series	RGB-H2
Input Voltage	120V AC, 60Hz
CCT	RGB
Wattage	2.7W per ft
Max Run	150 feet
Cuttable	Non-cuttable [†]
IP Rating	IP65 (uncut), void if cut
Dimmable	RGB / DMX / RF Control
Rating	cETLus Listed [†] for indoor/outdoor use
Rated Life	20,000 hrs

*Hybrid 2 RGB requires the use of RGB-H2-IR-5A or RGB-H2-CTRL (sold separately)

[†]cETLus Listing for 120V is void if cut; No accessories available for cut product

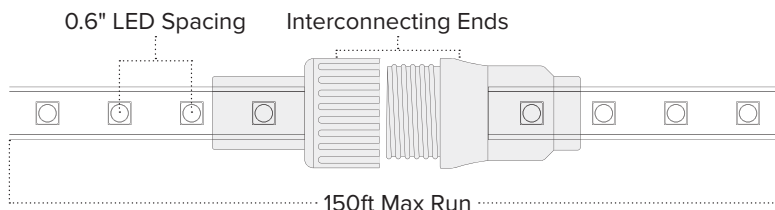

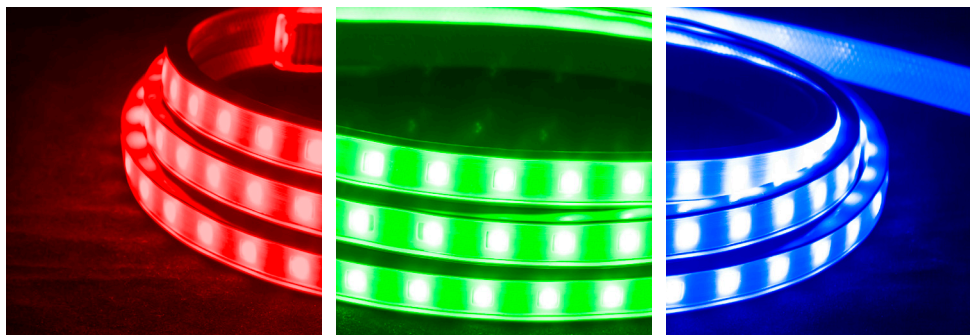

Hybrid 2 RGB
120V AC, 60Hz

HYBRID 2 RGB ORDERING INFORMATION

ITEM NUMBER	CCT	LENGTH	LUMENS / FT	WATTAGE	IP RATING	CRI	CUTTING
RGB-H2-EXT-3	RGB	3 ft	N/A	8.1W	IP65	N/A	Non-cuttable
RGB-H2-EXT-12	RGB	12 ft	N/A	32.4W	IP65	N/A	Non-cuttable
RGB-H2-EXT-30	RGB	30 ft	N/A	81W	IP65	N/A	Non-cuttable
RGB-H2-EXT-45	RGB	45 ft	N/A	121.5W	IP65	N/A	Non-cuttable

Hybrid 2 RGB Extendable Linear Light Includes: (1) Hybrid 2 RGB segment with molded male+female connectors / (1) Removable end cap / (1) Clear plastic mounting clip per foot of length

HYBRID 2 RGB ACCESSORIES

ITEM NUMBER	DESCRIPTION
RGB-H2-CTRL	Standalone controller (Required)
RGB-H2-REC-RF	RF receiver (Use w/RGB-H2-CTRL Trulux RF Control)
RGB-H2-IR-5A	IR controller (Includes Remote Control)
RGB-H2-CLIPS-AL	Aluminum mounting clips with screws (qty 10)
RGB-H2-CHAN-3	3' aluminum mounting channel
DMX-RGB-3	3 channel DMX controller
RGB-H2-XLR3-PT	XLR3 adapter
RGB-H2-CTRL-EC15	Signal linking cable
RGB-H2-EXT-JUMP.5	6" twist-on linking cables.
RGB-H2-EXT-JUMP3	3' twist-on linking cables.
RGB-H2-EXT-JUMP10	10' twist-on linking cables.
RGB-H2-EXT-JUMP20	20' twist-on linking cables.



Hybrid 2 RGB Basic Set-up

