



Features

- Fully encased design eliminates dotting and provides diffused lighting
- Eliminates the need for additional extrusion housings and lenses
- Features top-bend flexibility
- Cuttable every 3.94"
- Dimmable with ELV dimming drivers & Trulux Lighting controls
- Maximum runs up to 16.4 feet
- IP65 rating (encased) for indoor & outdoor use
- cULus Listed - 50,000 hours rated life

Available CCT



3000K 4000K

RGB

Control Options

- Trulux Single Color Controls
- Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming
- Requires Standard Dimmer + Adaptive Driver
- Trulux RGB Controls
- Requires Adaptive Driver + Trulux Receiver

Listing / Ratings




MicroLux - 24V

Featuring fully encased tape light, MicroLux provides smooth evenly diffused light that eliminates the needs for additional extrusion housings and lenses. With light emitting from three sides, MicroLux is a unique product that can be used in small spaces, or be placed on in direct view to meet the needs of dynamic lighting installations.

Technical Information

Series	MLUX
Input Voltage	24V
CCT	3000K / 4000K / RGB
CRI	90+
Wattage	4.4W per ft
Lumens	up to 375Lm per ft
Max Run	16.4 ft
Cuttable	Every 3.94"
IP Rating	IP65 (Encased) Wet Location Rated
Dimmable	10-100%
Rating	cULus Listed
Rated Life	50,000 hrs

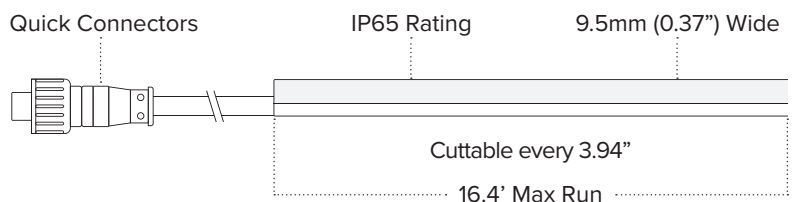



MLUX SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
MLUX-30	24V	3000K	16.4 ft	370Lm / ft	4.4W / ft	IP65	90+	3.94" (100mm)
MLUX-40	24V	4000K	16.4 ft	375Lm / ft	4.4W / ft	IP65	90+	3.94" (100mm)
MLUX-RGB	24V	RGB	16.4 ft	170Lm / ft	4.4W / ft	IP65	N/A	3.94" (100mm)


MLUX (IP65) 16.4ft Reels include: Attached 3ft Lead Wire & Mounting Clips

MLUX ACCESSORIES

ITEM NUMBER	DESCRIPTION
MLUX-CONKIT2	Single Color Power Feed (IP54)
MLUX-CONKIT4 (RGB)	RGB Power Feed
MLUX-JUMP2-5	6" Linking Cable (Single Color)
MLUX-JUMP2-2	24" Linking Cable (Single Color)
MLUX-SPL2	In-line Splice
MLUX-END	End Cap (QTY 10)
MLUX-CLIPS	Mounting Clips (QTY 10)
MLUX-CHAN-3A	1M Deep Mounting Channel
MLUX-CHAN-3B	1M Shallow Mounting Channel
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



Primary Side Dimming Set-up (Single Color)

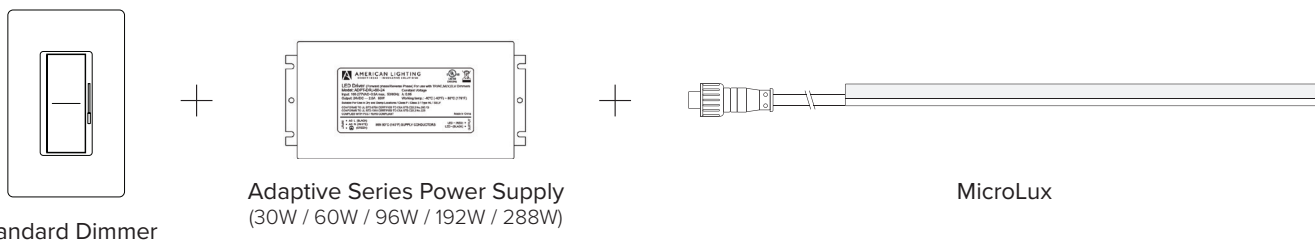

Trulux RGB Controller Set-up

