



Features

- Available in multiple trim styles
- Each LED module includes 2 dedicated faceplates in white and black finish
- Vertical and horizontal install options
- Light module rated for wet locations (IP65)
- No rough-in kit required - mounts to standard depth single gang junction box (includes watertight gasket)
- cETLus Listed for indoor and outdoor use
- 30,000 hours rated life

Available Finishes



White



Black

Dimming Options

- TRIAC (10-100%)

Listing / Ratings



SGL4 Series Step Lights - 120V

Available in a 3000K warm white light, the SGL4 120V step lights are available in multiple trim styles featuring vertical and horizontal mounting options. Each fixture includes white and black faceplates for design flexibility and mounts to most standard junction boxes for easy installation.

Technical Information

Series	SGL4
Input Voltage	120V AC, 60Hz
CCT	3000K
CRI	90+
Wattage	2W
Lumens	See individual product
Beam Angle	N/A
Dimmable	TRIAC / CL / LED (10-100%)
Mounting	Wall mount (standard single gang junction box)
Rating	cETLus Listed (wet location)
Rated Life	30,000 hrs


Ordering Information

SGL4-120-30-VL	Vertical Louver - 120V / 2W / 3000K / 16Lm
SGL4-120-30-HL	Horizontal Louver - 120V / 2W / 3000K / 13Lm
SGL4-120-30-VS	Vertical Slot - 120V / 2W / 3000K / 60Lm
SGL4-120-30-HS	Horizontal Slot - 120V / 2W / 3000K / 68Lm
SGL4-120-30-OW	Open Window - 120V / 2W / 3000K / 30Lm


SGL4 Step Lights



VERTICAL LOUVER
SGL4-120-30-VL
 (120V / 3000K / 16Lm)

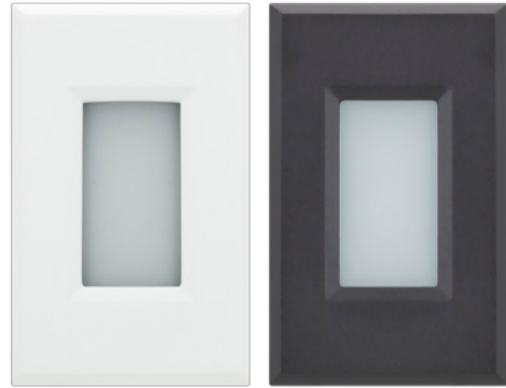

OPEN WINDOW
SGL4-120-30-OW
 (120V / 3000K / 30Lm)

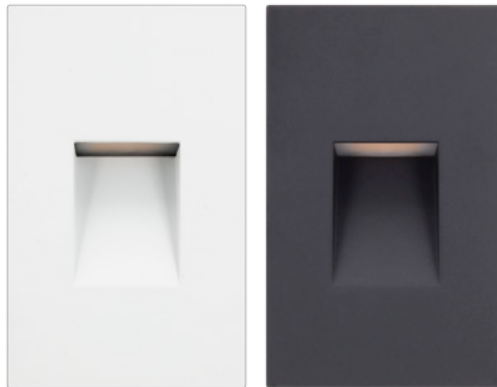

VERTICAL SLOT
SGL4-120-30-VS
 (120V / 3000K / 60Lm)



HORIZONTAL LOUVER
SGL4-120-30-HL
 (120V / 3000K / 13Lm)



HORIZONTAL SLOT
SGL4-120-30-HS
 (120V / 3000K / 68Lm)

TRULUX LIGHTING SYSTEMS

TASK LIGHTING

DOWNLIGHTING

DECORATIVE LAMPS

SGL4 - 120V
 ARCHITECTURAL LIGHTING

POWER SUPPLIES