

Features

- RGB color mixing capability
- Consumes up to 4.4 watts per foot
- Cuttable every 3.94"
- 22 foot max run (16.4 feet for IP68 version)
- (IP54) unjacketed or (IP68) submersible versions
- 50,000 hours rated life

Available CCT



RGB

Control Options

- Trulux RGB Controls
- Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver
- RGB In-line Controller

Listing / Ratings




TRULUX™ RGB - 24V

Our RGB Series tape light is a great solution for full color dynamic effects. Transform any space into a special event and add excitement to retail and commercial spaces. With over 16 million color combinations, evenly distribute dynamic color effect lighting that is sure to draw attention the application calls for.

Technical Information

Series	HTL-RGB
Input Voltage	24V
CCT	RGB
CRI	N/A
Wattage	up to 4.4W per ft
Lumens	up to 160Lm/ft
Max Run	22 ft
Cuttable	Every 3.94 in
IP Rating	IP54 (unjacketed) / IP68 (submersible)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

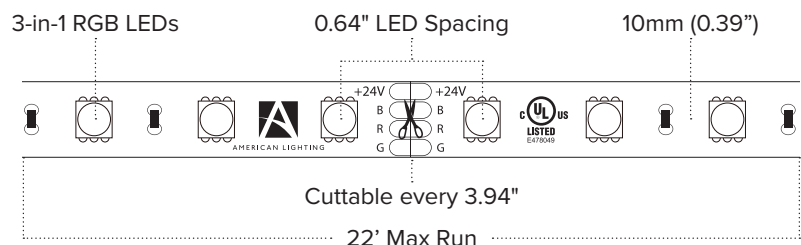



HTL-RGB SERIES ORDERING INFORMATION


Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTL-RGB	24V	RGB	16.4 ft	160Lm / ft	4.4W / ft	IP54	N/A	3.94" (100mm)
HTL-RGB-CC	24V	RGB	Custom Cut	160Lm / ft	4.4W / ft	IP54	N/A	3.94" (100mm)

HTL-RGB (IP54) 16.4ft Reels include: Attached 3ft lead wires / (3) Standard Power Connectors

RGB ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-4PWR-HD	6" HD Power Feed
TL-4SPL-HD	HD Tape to Tape Splice Connector
TL-4JUMP6-HD	6" HD Linking Cable
TL-4JUMP24-HD	24" HD Linking Cable
TL-CLIPS-15	IP68 Mounting Clips (QTY of 15)
WIRE-15-4PIN	15ft (20/4) Wire Spool
INLINE-RGB-CTRL	Simple Select RGB Controller
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

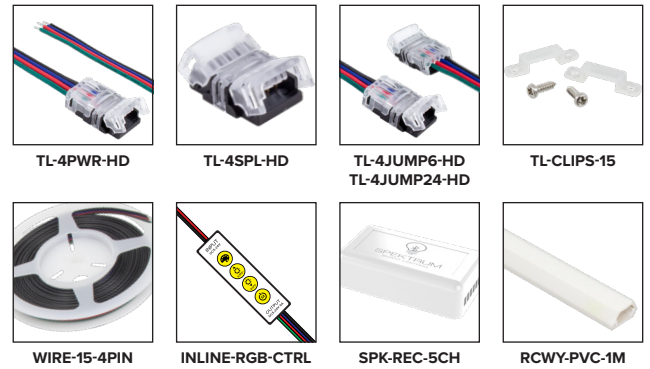

Building an RGB Trulux System?

See pages (78-79) for compatible RGB Trulux controllers & accessories

Trulux RGB Control



3 Zone Touch Plate
RF Wall Controller
RF-RGBW-3Z



8 Zone Remote
RF Remote Control
RF-RGBW-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z




3 Zone Touch Plate
DMX Wall Controller
DMX-3Z



Trulux DMX Receiver
(Required per zone)
REC-DMX-5A-4Z

Trulux RGB Controller Set-up



RGBW Controller
(3 zone)



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required per zone)



Trulux Tape Light