



Features

- RGB color control with Trulux controllers or Trulux App for dynamic color effects
- Field cuttable (once per reel) every 3.94"
- Sealed IP68 power input can be used with 10ft and 20ft jumpers for wet and submerged tape locations
- Run lengths up to 16.4 feet
- 50,000 hours rated life

Available CCT



RGB

Control Options

- Trulux RGB Controls
 - Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver

Listing / Ratings




TRULUX™ Submersible RGB - 24V

For water features or wet location applications, Trulux Submersible RGB tape is a highly sought after solution. With an IP68 outdoor submersible rating, our submersible tape can withstand most natural elements and can be field cut making for a great go to for small ponds and fountain lighting solutions.

Technical Information

Series	HTL68-RGB
Input Voltage	24V
CCT	RGB
CRI	N/A
Wattage	4.4W per ft
Lumens	up to 140Lm/ft
Max Run	16.4 ft
Cuttable	** Every 3.94 in **
IP Rating	IP68 (silicone encased)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

** Field cuttable (once per reel) - must be sealed with IP68 end caps and silicone

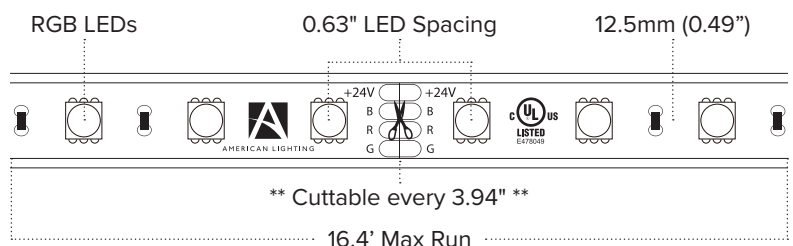

HTL68-RGB SUBMERSIBLE SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTL68-RGB	24V	RGB	16.4 ft	140Lm / ft	4.4W / ft	IP68	N/A	3.94" (100mm)


HTL68-RGB (IP68) Attached IP68 Power Feed / (15) Mounting Clips / (2) IP68 End Caps

HTL68-RGB SUBMERSIBLE ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-4JUMP68-10	10ft RGB Extension Cable (IP68)
TL-4JUMP68-20	20ft RGB Extension Cable (IP68)
TL-CLIPS-15	IP68 Mounting Clips - Qty 15
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)



TL-4JUMP68-10
TL-4JUMP68-20



TL-CLIPS-15



SPK-REC-5CH

Building a Submersible RGB Trulux System?

See pages (78-79) for compatible RGB Trulux controllers

Trulux RGB Control



3 Zone Touch Plate
RF Wall Controller
RF-RGBW-3Z



8 Zone Remote
RF Remote Control
RF-RGBW-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z




3 Zone Touch Plate
DMX Wall Controller
DMX-3Z



Trulux DMX Receiver
(Required per zone)
REC-DMX-5A-4Z

Trulux RGB Controller Set-up



RGBW Controller
(3 zone)



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required)




Trulux Tape Light

Smart Receiver Set-up



Smart Device


and / or



Smart Switch
Control



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Smart Receiver



24V Tape Light