




Features

- High Output White with 94+ CRI offers up to 335 lumens per foot using only 4.6 watts/foot; Warm White yields 270 lumens per foot
- Dimmable with Trulux controllers and most electronic low voltage dimmers
- Field cuttable (once per reel) every 3.94"
- Sealed IP68 power input can be used with 10ft and 20ft jumpers for wet and submerged tape locations
- Run lengths up to 16.4 feet
- 50,000 hours rated life

Available CCT



3000K 4000K

Control Options

- Trulux Single Color Controls
Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming
Requires Standard Dimmer + Adaptive Driver
- Single Color In-line Controller

Listing / Ratings




TRULUX™ High Output Submersible - 24V

For water features or wet location applications, Trulux Submersible tape is a highly sought after solution. With an IP68 outdoor submersible rating, our submersible tape can withstand most natural elements and can be field cut for custom applications making for a great go to for small ponds and fountain lighting solutions.

Technical Information

Series	HTL68
Input Voltage	24V
CCT	3000K / 4000K
CRI	94+
Wattage	4.6W per ft
Lumens	Up to 335Lm per ft
Max Run	16.4 ft
Cuttable	** Every 3.94 in **
IP Rating	IP68 (silicone encased)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

** Field cuttable (once per reel) - must be sealed with IP68 end caps and silicone

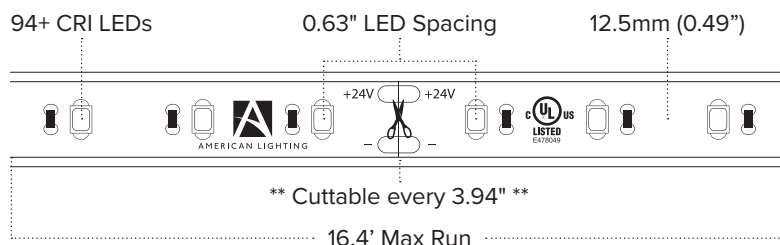

HTL68 SUBMERSIBLE SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTL68-WW	24V	3000K	16.4 ft	270Lm / ft	4.6W / ft	IP68	94+	3.94" (100mm)
HTL68-WH	24V	4000K	16.4 ft	335Lm / ft	4.6W / ft	IP68	94+	3.94" (100mm)


HTL68-WW/WH (IP68) 16.4ft Reels include: Attached IP68 Power Feed / (15) Mounting Clips / (2) IP68 End Caps

HTL68 SUBMERSIBLE ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-2JUMP68-10	10' Extension Cable (IP68)
TL-2JUMP68-20	20' Extension Cable (IP68)
TL-CLIPS-15	IP68 Mounting Clips (QTY of 15)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)



TL-2JUMP68-10
TL-2JUMP68-20




TL-CLIPS-15



SPK-REC-5CH

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)




Trulux Tape Light

Smart Receiver Set-up



Smart Device


and / or



Smart Switch
Control



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)




Smart Receiver



24V Tape Light

Trulux Single Color Set-up



Push Dial Controller
(Single zone)



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required)



Trulux Tape Light