

## Features

- RGB+Tunable CCT color mixing capability
- 3-in-1 RGB LEDs with Alternating Tunable CCT 2700K & 6000K LEDs
- Excellent color rendering (90+ CRI)
- Up to 410 lumens per foot performance
- Consumes up to 7 watts per foot
- Cuttable every 3.94"
- 13.1 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

## Available CCT



RGB + Tunable CCT

## Control Options

- Trulux RGB+TW DMX Controls  
- Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls  
- Requires Adaptive Driver + Trulux DMX Receiver
- RGBTW In-line Controller

## Listing / Ratings





## TRULUX™ RGB+TW - 24V

RGB + Tunable CCT tape light is the ultimate option in color changing RGB linear lighting technology. With RGB+TW, not only do you have a virtually unlimited RGB palette of color combinations, you also have the ability to adjust true white light ranging from 2700K up to 6000K. Providing intense color saturation, transition effects, and fade to white lighting effects for limitless color combinations.

## Technical Information

Series	SPTL-RGBTW
Input Voltage	24V
CCT	RGB + Tunable CCT (2700K-6000K)
CRI	90+
Wattage	up to 7W per ft
Lumens	up to 410Lm per ft
Max Run	13.1 ft
Cuttable	Every 3.94 in
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

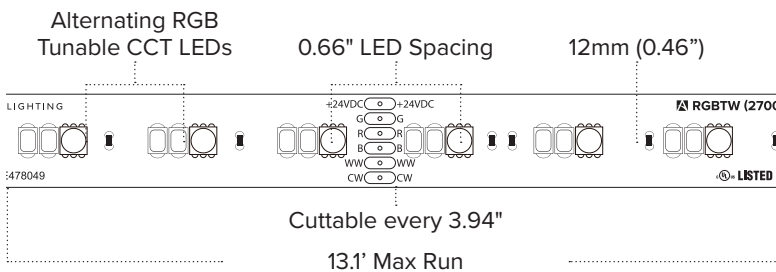



**SPTL-RGBTW SERIES ORDERING INFORMATION**

\*Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery\*


ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
<b>SPTL-RGBTW</b>	24V	RGB+TW	13.1 ft	410Lm / ft	7W / ft	IP54	90+	3.94" (167mm)
<b>SPTL-RGBTW-100</b>	24V	RGB+TW	100 ft	410Lm / ft	7W / ft	IP54	90+	3.94" (167mm)

SPTL-RGBTW (IP54) 13.1ft Reels include: Attached 3ft lead wires / (3) TL-6PWR

SPTL-RGBTW-100 (IP54) 100ft Reels include: Attached 3ft lead wires / (5) TL-6PWR

**RGBTW ACCESSORIES**

ITEM NUMBER	DESCRIPTION
<b>TL-6PWR-HD</b>	6" HD Power Feed (IP54)
<b>TL-6SPL-HD</b>	HD Splice (IP54)
<b>TL-6JUMP6-HD</b>	6" HD Linking Cable (IP54)
<b>TL-6JUMP24-HD</b>	24" HD Linking Cable (IP54)
<b>WIRE-15-6PIN</b>	15ft (20/6) Wire Spool
<b>INLINE-RGBTW-CTRL</b>	Simple Select RGBTW Controller
<b>SPK-REC-5CH</b>	Spektrum Smart Receiver (App Controlled)
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway

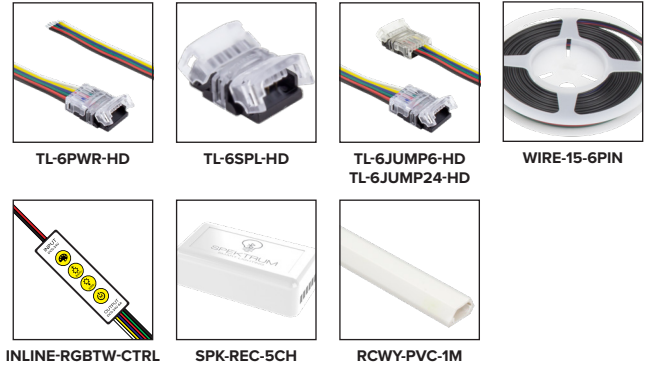

**Building an RGB+TW Trulux System?**

See pages (82-83) for RGB+TW DMX Trulux controller & receiver

**Trulux RGB+TW Control (Required for operation)**




**RGB+TW DMX Wall Controller**  
**DMX-RGBTW-1Z**



**Trulux DMX 5-channel DMX Receiver**  
**REC-DMX-RJ45-5CH**


**Trulux RGB+TW Controller Set-up**



**RGB+TW Controller (Single Zone)**



**Adaptive Series Power Supply (30W / 60W / 96W / 192W / 288W)**



**Trulux DMX Receiver (Required)**




**Trulux Tape Light**

**Smart Receiver Set-up**



**Smart Device**

and / or



**Smart Switch Control**



**Adaptive Series Power Supply (30W / 60W / 96W / 192W / 288W)**



**Smart Receiver**



**24V Tape Light**