




## Features

- Excellent color rendering (90+ CRI)
- Color temperatures from 2700K to 4000K
- Up to 112 lumens per foot performance
- Consumes up to 1.47 watts per foot
- Dimmable with ELV dimmers
- Cuttable every 1.97"
- 65.6 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

## Available CCT



2700K 3000K 4000K

## Control Options

- Primary Side Dimming
- Trulux Single Color Controls
- Spektrum Smart Receiver (App Controlled)
- Single Color In-line Controller

## Listing / Ratings





## TRULUX™ Max Run - 24V

For large scale projects, the Max Run series provides a more convenient installation by minimizing drivers and connections. Max Run tape is a great tool for lighting coves, corridors, lobbies, and retail spaces featuring a max run length up to 65 feet and available in 2700K, 3000K, and 4000K popular color temperatures.

## Technical Information

Series	STMR
Input Voltage	24V
CCT	2700K / 3000K / 4000K
CRI	90+
Wattage	Up to 1.47W per ft
Lumens	Up to 112Lm per ft
Max Run	65.6 ft
Cuttable	Every 1.97 in
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

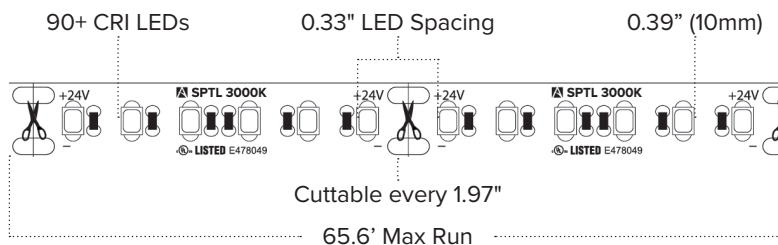



MAX RUN  
TRULUX TAPE LIGHT

**STMR SERIES ORDERING INFORMATION**

\*Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery\*

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
<b>STMR-27-65</b>	24V	2700K	65.6 ft	108Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)
<b>STMR-30-65</b>	24V	3000K	65.6 ft	110Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)
<b>STMR-40-65</b>	24V	4000K	65.6 ft	112Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)

STMR (IP54) 65.6ft Reels include: Attached 3ft Lead Wire / (3) TL-CONKIT / (3) TL-BLKS / (3) HD Power Feeds / (3) HD Splice Connectors

**SINGLE COLOR ACCESSORIES**

ITEM NUMBER	DESCRIPTION
<b>TL-CONKIT</b>	Trulink 4-in-1 Connection Kit
<b>TL-BLKS</b>	Trulink 4-in-1 Connector Block (QTY 10)
<b>TL-2PWR-HD</b>	6" HD Power Feed
<b>TL-2JUMP6-HD</b>	6" HD Linking Cable
<b>TL-2JUMP24-HD</b>	24" HD Linking Cable
<b>TL-2SPL-HD</b>	HD Tape to Tape Splice Connector
<b>WIRE-15-2PIN</b>	15ft (20/2) Wire Spool
<b>INLINE-SC-CTRL</b>	Simple Select In-line Controller (Single Color)
<b>SPK-REC-5CH</b>	Spektrum Smart Receiver (App Controlled)
<b>LVS-2PIN</b>	In-line Terminal Block
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway



TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING


ARCHITECTURAL LIGHTING

POWER SUPPLIES

**Building a Single Color Trulux System?**

See pages (52-53) for compatible single color Trulux controllers & accessories

Primary Side Dimming Set-up

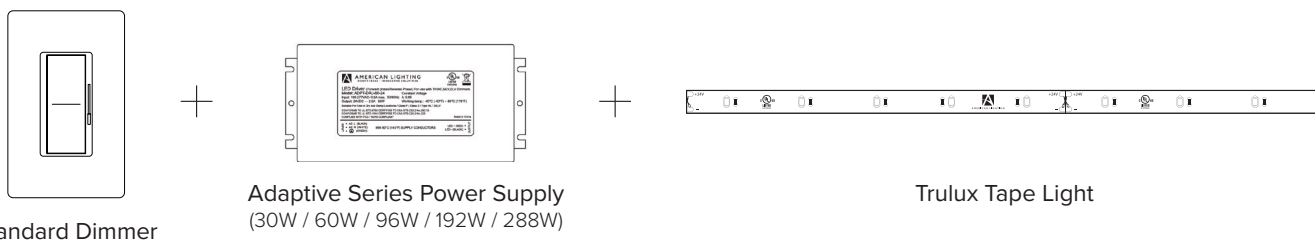

Smart Receiver Set-up

