

PROJECT: TYPE:

LOCATION: CAT:



Description

The Invisible Slot is designed to be used in drywall and other flat surfaces during remodeling or new construction. Subset flanged edges on either side disappear beneath drywall mud for a clean line-of-light look.

Features

- Extruded aluminum construction
- Use tape light, lens, and end caps to create a complete fixture (tape light and accessories sold separately)

Mounting

Recess mount via screws or construction adhesive during new construction or remodel; seal in flanges during mud work, texturing, and painting.

Applications



Lines of light across walls, ceilings, and other flat surfaces

Warranty

3 years

Technical Information

Profile Dimensions

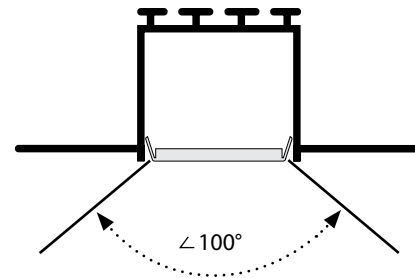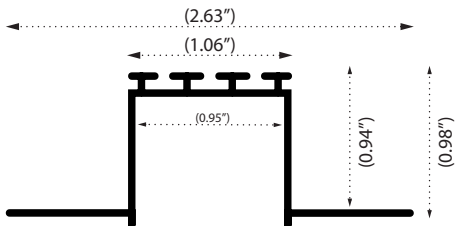

Ordering Information



Invisible Slot
Extrusion

MODEL	TYPE	LENGTH
PE	INVSLOT	2M

PE-INVSLOT-2M includes:
(1) 2M Invisible Slot extrusion

*Invisible Slot Channel is available as special order only
Please allow up to 2 weeks for order processing.

Accessories

Image	Part Number	Description
	PE-SLOTLENS-2M	2 meter frosted polycarbonate lens for Invisible Slot extrusion; UV Resistant/Flame Retardant
	PE-INVSLOT-END	Polypropylene plastic end cap for Invisible Slot extrusion