

PROJECT: TYPE:

LOCATION: CAT:



Description

The Flange Slot is designed to be used in drywall and other flat surfaces during remodeling or new construction. 3/8" flanged edges on either side nearly disappear for a clean line-of-light look.

Features

- Extruded aluminum construction
- Use tape light, lens, spring clips, and end caps to create a complete fixture (tape light and accessories sold separately)

Mounting

Recess mount via spring mounting clips

Applications



Lines of light across walls, ceilings, and other flat surfaces

Warranty

3 years

Technical Information

Profile Dimensions

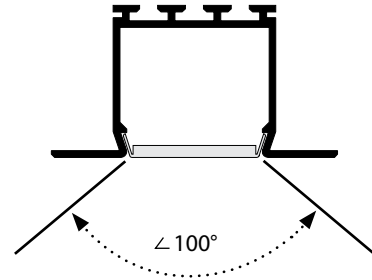

Ordering Information




Flange Slot Extrusion



PE-DFSLOT-2M includes:
(1) 2M Flange Slot extrusion

*Standard Flange Slot Channel is available as special order only
Please allow up to 2 weeks for order processing.

Accessories

Image	Part Number	Description
	PE-SLOTLENS-2M	2 meter frosted polycarbonate lens for Flange Slot extrusion; UV Resistant/Flame Retardant
	PE-DFSLOT-END	Polypropylene plastic end cap for Flange Slot extrusion
	PE-DFSLOT-CLIP	Spring mounting clips for Flange Slot extrusion