

PROJECT:

TYPE:

LOCATION:

CAT:



Description

The sloped shoulders of the Triple Stant Premium Extrusion arch to the mounting surface on both sides, offering a strong presence with a tailored look.

Features

- Extruded aluminum construction
- Three evenly spaced channels allow for three rows of tape light
- Use tape light, lens, and end caps to create a complete fixture (tape light and accessories sold separately)

Mounting

Surface mount via 3M™ adhesive tape, construction adhesive, or flat-head counter-sunk screws in holes drilled through extrusion; Requires a 2-3/8" width and 3/8" height clearance

Applications



Under-cabinet, work areas, and other task lighting applications

Warranty

3 years

Technical Information

Profile Dimensions

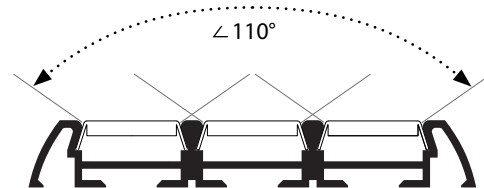

Ordering Information

Triple Stant Extrusion




MODEL	TYPE	LENGTH
PE	3STANT	1M

PE-3STANT-1M includes:

(1) 1M Triple Stant Aluminum extrusion

*Triple Stant Extrusion is available as special order only
 Please allow up to 2 weeks for order processing.

Accessories

Image	Part Number	Description
	PE-UVSTANT-1M	1 meter frosted polycarbonate lens for Triple Stant extrusion; UV Resistant/Flame Retardant
	PE-3STANT-END	Polypropylene plastic end cap for Triple Stant extrusion
	3M-TAPE-10	1/2" x 4" Length Strips of 3M® double-sided adhesive tape (Bag of 10)