

PROJECT:  TYPE:

LOCATION:  CAT:



### Description

Multi-purpose surface mount disc for use with standard and pancake junction boxes. The sleek, low-profile design is available in two sizes with 3000K energy-saving dimmable LED light, driver on-board, and polycarbonate lens to diffuse and soften light. Easy mounting style makes installation quick and hassle-free.

### Features

- Excellent color rendering (90+ CRI)
- Two sizes available with up to 1050 lumens
- Low profile design, as little as 1" high
- On-board driver
- Polycarbonate lens for diffuse, soft light
- Dimmable with most ELV and TRIAC dimmers
- cETLus Listed for Wet locations
- 35,000 hours rated life
- ENERGY STAR certified

### Mounting

Mounts directly to most standard depth and 'pancake' 4" and 5"/6" junction boxes


### Applications

General Lighting LED Retrofit

## Technical Information



Voltage	120V AC, 60Hz		
CCT	3000K	4000K	
Series	QD4	QD6	QD6
Finish	White		
Lumens	650	1050	1050
Wattage	9	15	15
CRI	90+		
Beam Angle	110°		
Dimming	5-100% with most standard incandescent (TRIAC) and low-voltage electronic (ELV) dimmers		
Rating	cETLus Listed; Wet location		
Rated Life	35,000 Hours		

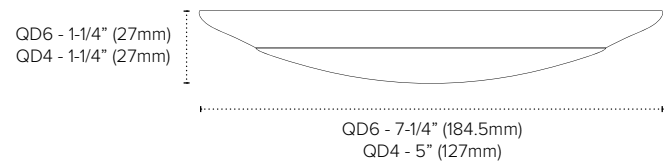

## Ordering Information

**120V AC, 60Hz Quick Disc**

PRODUCT	CCT	FINISH
<input type="text"/>	<input type="text" value="30"/>	<input type="text" value="WH"/>
QD4 = 4" Quick Disc QD6 = 6" Quick Disc	30 = 3000K	WH = White

## Compatible Dimmers


Brand	Model #	Type	Dimming Range	Notes
Lutron® Diva	DVCL-153P	Universal (CFL/LED/Incandescent)	5-100%	
Lutron® Toggler	TGCL-153PH	Universal (CFL/LED/Incandescent)	10-100%	
Lutron® Skylark	SELV-300P	Electronic Low-Voltage (ELV)	5-100%	
Lutron® Diva	DV-600P	Incandescent	5-100%	
Leviton® Sureslide	6674	Universal (CFL/LED/Incandescent)	5-100%	

Minimum loads may apply. Dimmer performance may vary in field application due to unknown external factors. Dimmers not included on the chart above are not necessarily incompatible; they have yet to be fully evaluated. Please reference dimmer manufacturer's instructions for more detailed information regarding performance and compatibility.

## QUICK DISC SERIES PHOTOMETRICS

### QD4


<b>PART NUMBER</b>	QD4-30-WH
<b>BEAM SPREAD</b>	115.5°
<b>LUMENS</b>	564.6 Lm
<b>WATTAGE</b>	9W
<b>EFFICACY</b>	62.8 Lm/W
<b>CCT</b>	3000K
<b>CRI</b>	94.3

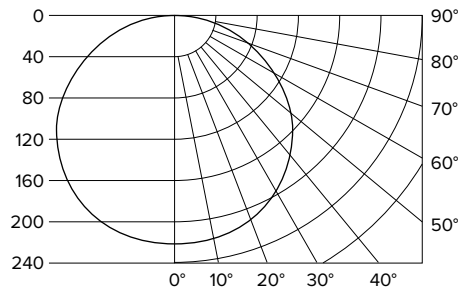

Foot Candles	Distance From Light	Beam Dia.
11.4	4'	12.7'
5.1	6'	19'
2.8	8'	25.4'
1.8	10'	31.7'
1.3	12'	38'
0.9	14'	44.4'

### QD6

<b>PART NUMBER</b>	QD6-30-WH
<b>BEAM SPREAD</b>	114.9°
<b>LUMENS</b>	984.33 Lm
<b>WATTAGE</b>	15W
<b>EFFICACY</b>	65.6 Lm/W
<b>CCT</b>	3000K
<b>CRI</b>	93.2

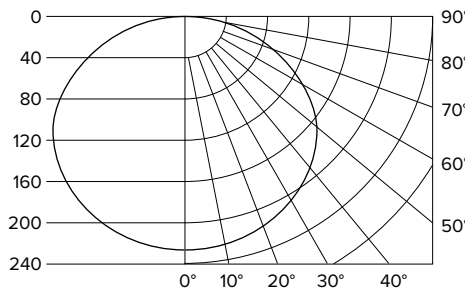

Foot Candles	Distance From Light	Beam Dia.
20.0	4'	12.5'
8.9	6'	18.8'
5.0	8'	25.1'
3.2	10'	31.3'
2.2	12'	37.6'
1.6	14'	43.9'

## NIVO SERIES RECOMMENDED DIMMERS

BRAND	MODEL #	TYPE	DIMMING RANGE
LUTRON	DVCL	CFL / LED / INCANDESCENT	5% - 100%
LUTRON	TGCL-153PH	CFL / LED / INCANDESCENT	10% - 100%
LUTRON	SELV-300P	ELV	5% - 100%
LUTRON	DV-600P	INCANDESCENT	5% - 100%
LEVITON	6674	CFL / LED / INCANDESCENT	5% - 100%