



PROJECT:

TYPE:

LOCATION:

CAT:



**Description**

Trulux back-lit touch wall control for tunable CCT light control; 1-4 operation with 1-3 scene control.

**Features**

- Touch for On/Off control
- Swipe for RGB or 2700K-6000K light control
- Toggle between RGB and 2700K-6000K or have both on simultaneously
- Smooth glass faceplate with illuminated controls
- Carry reliable DMX 512 signals up to 400 feet
- Requires Trulux DMX receiver for install (sold separately)

**Mounting**

Flush mount to wall or flat surface (1-3/4" x 2-5/8" cut-out)

**Applications**

RGB + Tunable CCT Control

**Warranty**


3 years

## Technical Information



Voltage	12-24V DC
Power Consumption	200mA
Output	DMX 512 Signal
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

**Dimensions**

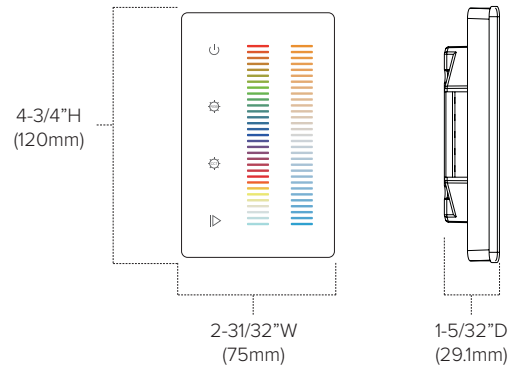

## Recommended Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-DMX-RJ45A-5CH	Trulux DMX 512 5Channel Receiver	Dry location	12-24V DC	5x8A	5x(96-192)W	RoHS	6-1/2" x 2-29/32" x 1-15/32"

Controller can be powered from secondary side of 12-24V DC driver being used to power the Trulux receiver/Trulux tape light. See 'Trulux Control Options' on selected tape light for more information.

## Ordering Information

**Trulux DMX  
RGB + Tunable  
CCT Touch Wall  
Control**



**DMX-RGBTW-1Z includes:**

- (1) Trulux DMX RGB + Tunable CCT Touch Wall Control (requires Trulux DMX receiver, sold separately)

Example Part # **DMX-RGBTW-4Z**

