



PROJECT:

TYPE:

LOCATION:

CAT:



**Description**

Trulux dial wall control for single color light control; single zone operation.

**Features**

- Push dial for On/Off control
- Rotate dial for full range dimming (1-100%)
- Smooth glass faceplate with brushed satin nickel dial
- Radio frequency (RF) signal range up to 65 feet
- Battery operated (CR2032 battery included)
- Control multiple receivers in a single zone
- Requires Trulux RF receiver for operation (sold separately)

**Mounting**

Flush mount to wall or flat surface (1-3/4" x 2-5/8" cut-out)

**Applications**

Dimming and zone control for single color light

**Warranty**


3 years

## Technical Information



Voltage	3V DC Operation voltage (battery operated 10mA power consumption)
Battery Type	CR2032 (Included)
Frequency	916.5MHz RF wireless
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

**Dimensions**

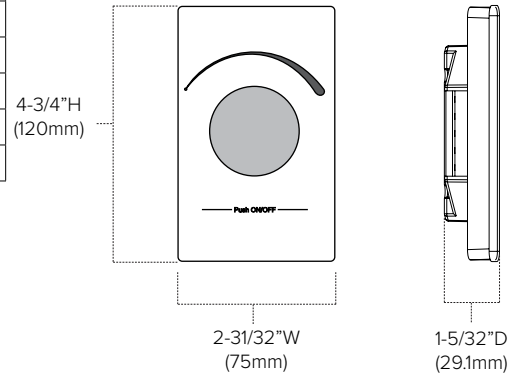


## Required Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-5A-4Z	Trulux RF Constant Voltage Receiver	Dry location	12-36V DC	4x5A	4x(60-180)W	RoHS	7-1/16" x 1-13/16" x 6-23/32" (178.9mm x 45.5mm x 18.6mm)

## Ordering Information

**Trulux Dial  
Wall Control**



**SRF-BATT includes:**

(1) Trulux Dial Wall Control  
(requires Trulux receiver)

Example Part # **SRF-BATT**

