

STMR MAX RUN TAPE LIGHT

24V Standard Grade Max Run

For large scale projects, the Max Run Series provides a more convenient installation by minimizing drivers and connections. Standard Max Run tape is a great tool for lighting coves, corridors, lobbies and retail spaces featuring a length of 65.6ft available in 2700K, 3000K, and 4000K popular color temperatures.

- High Density (HD) LED spacing in Standard Grade Output
- Available in 2700K, 3000K, and 4000K
- 90+ color rendering index
- Lumen output up to 110Lm per foot
- Cuttable every 1.97" with 65.6ft max run
- Easy installation featuring 3M VBH adhesive backing
- IP54 rating featuring nano-coating protective layer
- Dimmable (5-100%) with most ELV, MLV, TRIAC dimmers
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life / 5-year limited warranty




STMR SERIES QUICK SPECS	
VOLTAGE	24V
WATTAGE	1.47W / ft
LUMENS	Up to 110Lm / ft
CCT OPTIONS	2700K / 3000K / 4000K
CRI	90+
MAX RUN	65.6ft
CUTTING POINTS	1.97" (50 mm)
IP RATING	IP54 Unjacketed
DIMMING	10 - 100% TRIAC / MLV / ELV
DIMENSIONS	0.39" (10mm) W x 0.06" (1.65mm) H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Dry / Damp Location
RATED LIFE	50,000 Hours

PROJECT: _____

TYPE: _____

LOCATION: _____

CATALOG NUMBER: _____

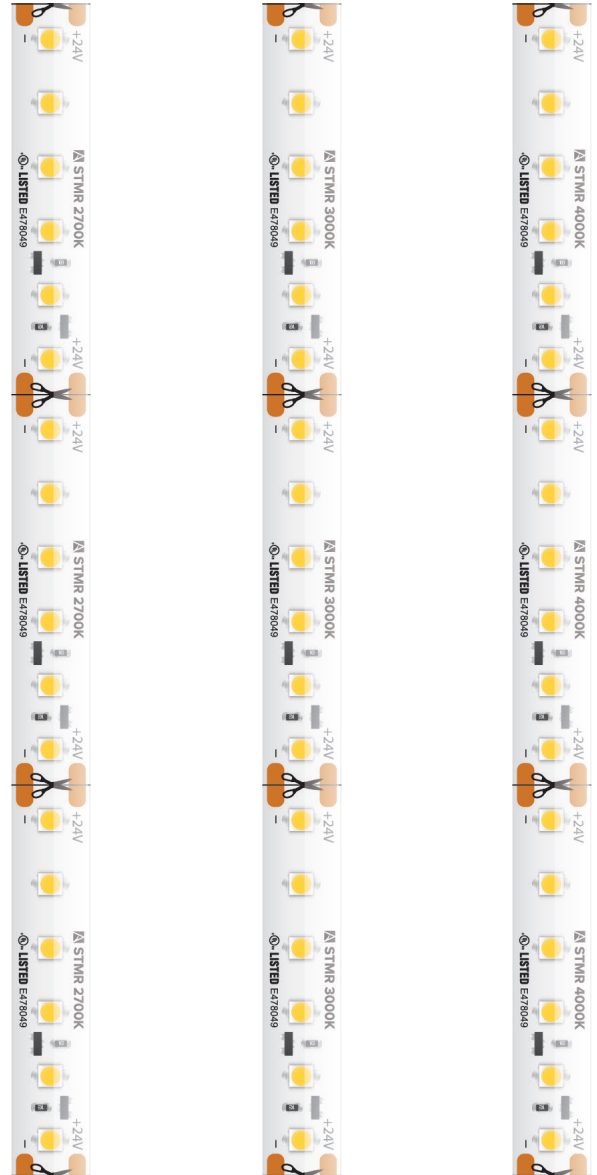


STMR-27-65
(2700K)

STMR-30-65
(3000K)

STMR-40-65
(4000K)

STMR SERIES QUICK TECH

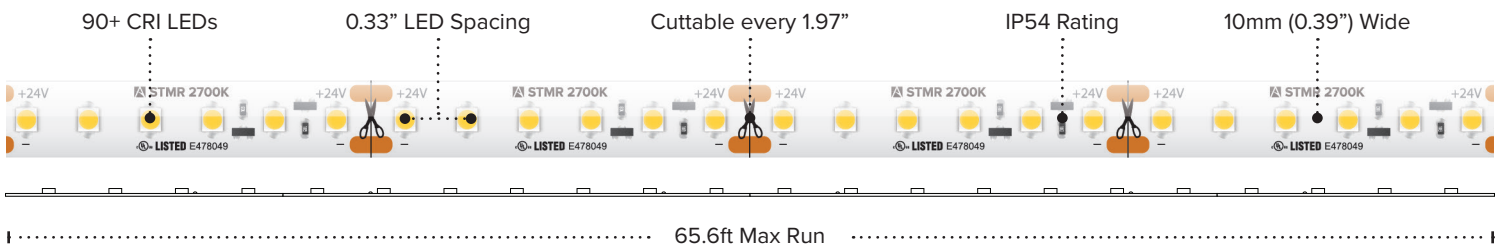


STMR SERIES ORDERING INFORMATION *Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery*



ITEM NUMBER	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
STMR-27-65	2700K	65.6 ft	110Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)	65.6 ft
STMR-30-65	3000K	65.6 ft	110Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)	65.6 ft
STMR-40-65	4000K	65.6 ft	110Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)	65.6 ft

STMR SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	HD Power Feed (IP54)
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
WIRE-15-2PIN	15ft 20/2 Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)

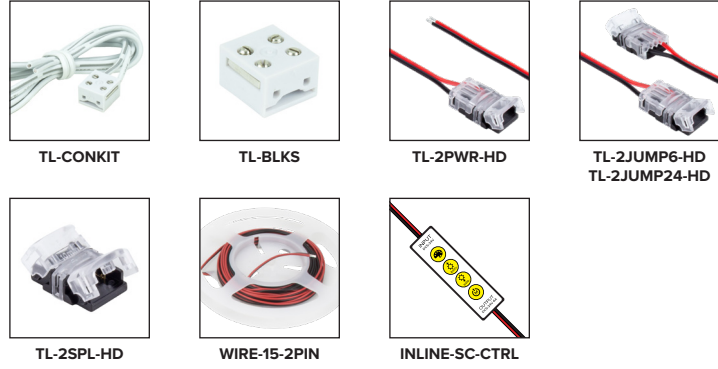

STMR SERIES QUICK SET-UP

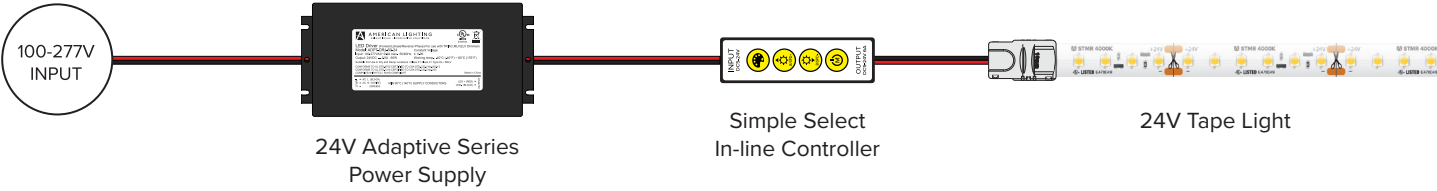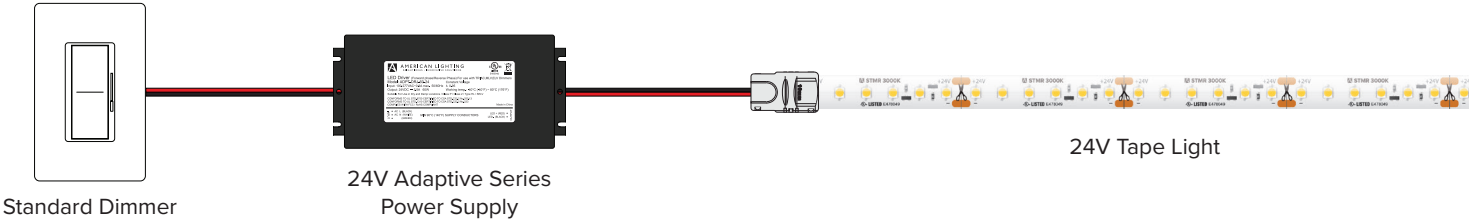

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPT-DRJ-30-24	Adaptive Series 30W	30W / 3W	100-277V AC	24V	Yes*	6.49"L x 3.6"W x 1.02"H
ADPT-DRJ-60-24	Adaptive Series 60W	60W / 6W	100-277V AC	24V	Yes*	7.4"L x 3.6"W x 1.02"H
ADPT-DRJ-96-24	Adaptive Series 96W	96W / 9.6W	100-277V AC	24V	Yes*	8.66"L x 3.6"W x 1.61"H
ADPT-DRJ-192-24	Adaptive Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V	Yes*	10.94"L x 4.25"W x 1.8"H
ADPT-DRJ-288-24	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V	Yes*	11.85"L x 4.25"W x 1.8"H

Phase Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers