


PROJECT:  TYPE:

LOCATION:  CAT:

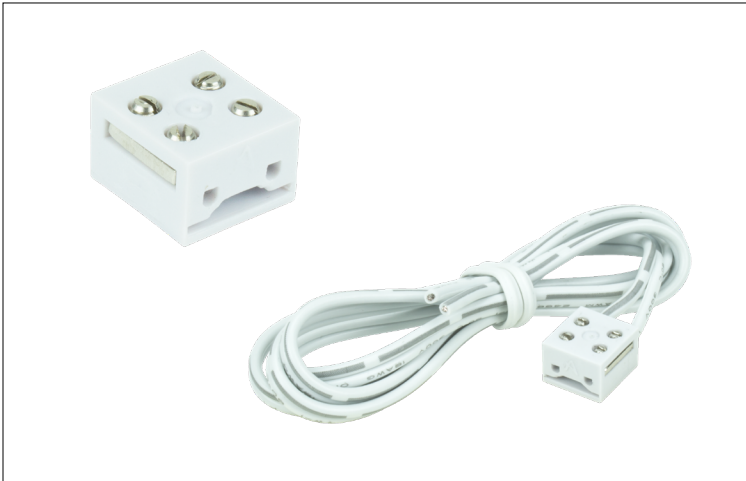

### Description

This multipurpose connector block powers, splices, and connects Trulux Single Color tape light in multiple fashions and is designed to make installations faster and easier.

### Features

- Reliable connection every time
- Durable and compact construction
- Available as a connection block (TL-BLKS, sold in bags of 10) or a power connection kit including 36" of 18AWG wire (TL-CONKIT)
- For use with Single color (UWX, UWW, WW, WH) Trulux in Standard IP54/IP65\*, High Output IP54/IP65\*, or Spec Grade IP54/IP65\* options (\*IP65 modification: You will need to remove the first 1/4" of protective coating at the cut end in order for tape light to fit into the Trulink Connector)

### Mounting



Surface or recess mount via attached 3M® double-sided adhesive tape; Compatible with the following extrusions: Olin, Turbo, Premium 45, Double Flange, Universal, Paver, and assorted drywall slot extrusions

### Applications

Connecting Trulux tape light via wire-to-tape, tape-to-tape splice, tape-to-tape jumper, or tape-to-tape with central feed

## Technical Information

### Dimensions

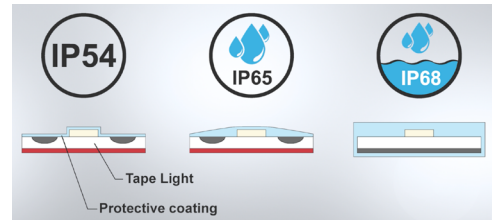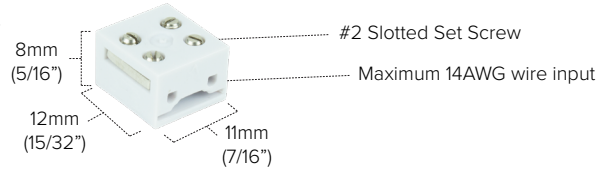

When using the Trulink Connector, it is recommended to scrape off the coating from each conductor to ensure a proper connection.

## Ordering Information

**Trulink Connector** MODEL **TL** — TYPE

**CONKIT** = (1) Trulink Connector block with 36" lead  
**BLKS** = (10) Trulink Connector blocks

### Wire-to-Tape



### Tape-to-Tape Splice



### Tape-to-Tape Jumper



### Tape-to-Tape with Central Feed

