





## Features

- Low-profile high impact continuous line of light
- Color temperatures in 2700K and 5000K as well as single colors (Amber, Blue, and Red)
- Up to 63 Lumens per foot
- Consumes only 2.4W
- Dimmable 10-100%\*
- Economical - up to 150ft run lengths without the need for a driver
- Sold as 150ft reels†
- cETLus Listed†
- Suitable for indoor and outdoor use
- 30,000 hours rated life

## Available Colors



## Dimming Options

- Standard Incandescent (10-100%\*)
- Low-voltage magnetic (10-100%\*)
- Low-voltage electronic (10-100%\*)

## Listing / Ratings†



## Polar 2 Mini Neon Reels - 120V

Polar 2 Mini Neon delivers brilliant neon color in a smaller, more compact design. The flexible rubber housing and PVC lens are UV protected to ensure optimal performance over a 30,000 hour rated life. Easy to use, 120V plug-in design allows 150ft run lengths (ETL listing is void if reel is cut).



## Technical Information

Series	MINI-P2-NF
Input Voltage	120V AC
CCT	2700K / 5000K / AY / BL / RE
CRI	78+ (2700K / 5000K)
Wattage	2.4W per ft
Lumens	Up to 63Lm per ft (see individual product)
Max Run	150 feet
Cutttable	Every 18"
IP Rating	IP65**
Dimmable	10-100%*
Rating	cETLus Listed†; Suitable for indoor/outdoor use
Rated Life	30,000 hrs

\*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers

\*\*IP65 rated only when used with pre-attached molded power cord and end cap is either pre-attached or properly sealed with dielectric grease, silicone and shrink tube

†cETLus Listing is void if product is cut

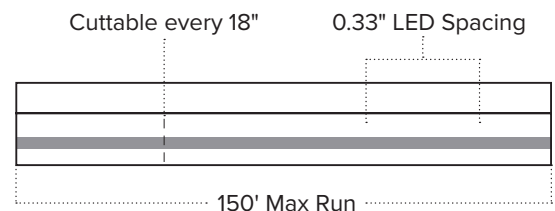



Warm White - 2700K  
Opaque White Jacket



Bright White - 5000K  
Opaque White Jacket



Amber LEDs  
Opaque Yellow Jacket



Blue LEDs  
Opaque Blue Jacket



Red LEDs  
Opaque Red Jacket


**POLAR 2 MINI ORDERING INFORMATION**

ITEM NUMBER	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
<b>MINI-P2-NF-WW</b>	2700K	150 ft	63Lm / ft	2.4W / ft	IP65	78+	18" (457mm)
<b>MINI-P2-NF-WH</b>	5000K	150 ft	63Lm / ft	2.4W / ft	IP65	78+	18" (457mm)
<b>MINI-P2-NF-AY</b>	Amber 590nm	150 ft	21Lm / ft	2.4W / ft	IP65	N/A	18" (457mm)
<b>MINI-P2-NF-PI</b>	Pink 610nm	150 ft	5Lm / ft	2.4W / ft	IP65	N/A	18" (457mm)
<b>MINI-P2-NF-RE</b>	Red 619nm	150 ft	5Lm / ft	2.4W / ft	IP65	N/A	18" (457mm)

120V Bulk Reels Include: (1) Attached MINI-P2-NF-CONKIT-8A / (4) MINI-P2-NF-CONKIT-8A

**POLAR 2 MINI ACCESSORIES**

ITEM NUMBER	DESCRIPTION
<b>MINI-P2-NF-CONKIT-8A</b>	120V 5Ft power connector kit w/Plug
<b>MINI-P2-NF-JUMP.5</b>	6" linking cable
<b>MINI-P2-NF-JUMP3</b>	3' linking cable
<b>MINI-P2-NF-JUMP10</b>	10' linking cable
<b>MINI-P2-NF-JUMP20</b>	20' linking cable
<b>MINI-P2-NF-INV5</b>	Invisible splice kit
<b>MINI-P2-NF-CHAN-3</b>	3' aluminum mounting channel
<b>MINI-P2-NF-CLIPS</b>	Mounting clips (qty 10)
<b>MINI-P2-NF-ENDS</b>	End caps (qty 10)



MINI-P2-NF-CONKIT-8A




MINI-P2-NF-JUMP.5




MINI-P2-NF-JUMP10




MINI-P2-NF-INV5



MINI-P2-NF-CHAN-3



MINI-P2-NF-CLIPS



MINI-P2-NF-ENDS